

Texecom

Designed to Perform

Texecom Limited

Bradwood Court, St. Crispin Way,
Haslingden, Great Britain BB4 4PW

Telephone (General) +44 (0)1706 234800

Facsimile (Sales) +44 (0)1706 223450

Email intsales@texe.com

Capture CQ (AKF-0003)



Features:

The Capture CQ from Texecom features an omni-directional quad element pyro for true 360° pickup. Advanced digital design ensures maximum false alarm immunity in all environmental conditions, yet still maintains optimum catch performance. With an exceptional specification, the Capture CQ is clearly the only choice for all round protection.

- ✓ 3.6m maximum mounting height
- ✓ 9.3m maximum diameter coverage pattern
- ✓ Selectable Pulse Count
- ✓ Sealed Optics
- ✓ Optional Low sensitivity mode
- ✓ Omni-directional Quad Element Pyro for True 360° Coverage
- ✓ EN 50131-2-2, EN 50131-1, PD6662:2017 Grade 2 Class II



Certificate Number: FM 35285

Registered Office: Bradwood Court, St. Crispin Way, Haslingden, Lancs BB4 4PW.
Registered in England No. 2084170

Texecom

Designed to Perform

Texecom Limited

Bradwood Court, St. Crispin Way,
Haslingden, Great Britain BB4 4PW

Telephone (General) +44 (0)1706 234800


Facsimile (Sales) +44 (0)1706 223450

Email intsales@texe.com


Specifications:

| | |
|-----------------------|----------------------------|
| Operating Voltage | 9-15Vdc |
| Maximum Current | 12mA |
| Quiescent Current | 9.3mA |
| Relative Humidity | 0-95% non-condensing |
| Operating Temperature | -10°C to +50°C |
| Weight | 106g |
| Dimensions | 125mm Diameter, 43mm Depth |

Coverage:

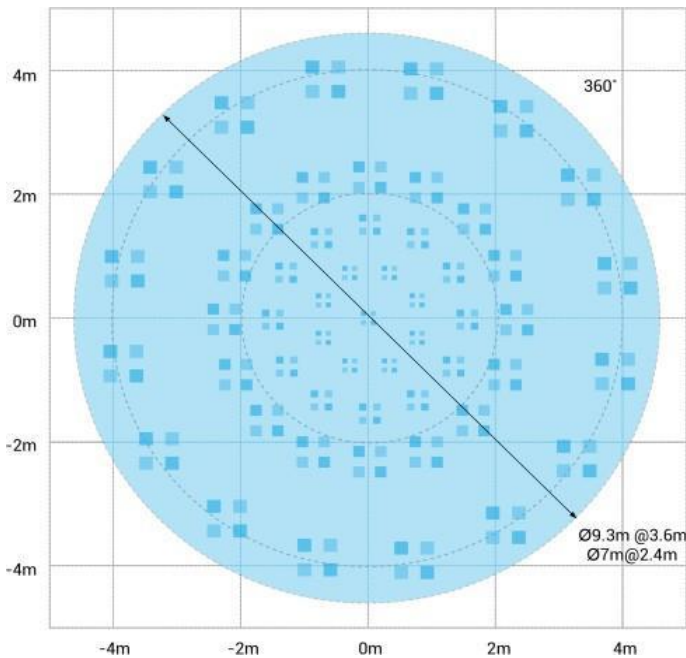

Top View

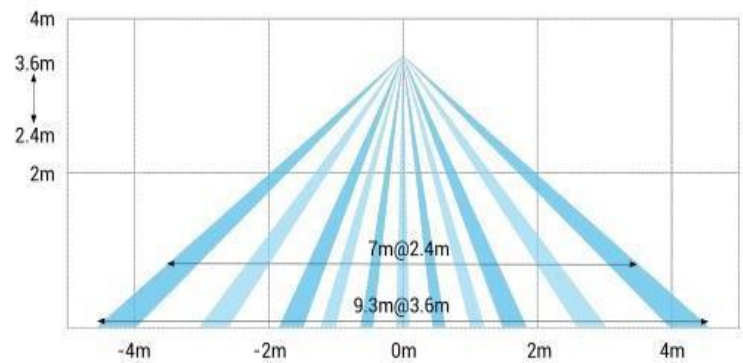

Side View



Certificate Number: FM 35285

Registered Office: Bradwood Court, St. Crispin Way, Haslingden, Lancs BB4 4PW.
Registered in England No. 2084170