

Texecom Limited Bradwood Court, St. Crispin Way, Haslingden, Great Britain BB4 4PW

Telephone (General) +44 (0)1706 234800

Facsimile (Sales) +44 (0)1706 223450

Email intsales@texe.com

Micro Shock-W (GHC-008/9/10) (Grey/Brown/White)



Description:

The Micro Shock-W is designed to detect and analyses a forcible shock and provide early warning of an attempted intrusion before a break-in occurs, ensuring the safety of people and property inside. The ultra-miniature design provides discrete yet powerful protection for all windows, doors and walls.

FEATURES:

- Small size 57mm x 27.5mm x 8.2mm
- Superior accelerometer technology
- Three colour options
- LED assisted setup procedure
- 3 Year typical battery life
- EN50131-2-8 Grade 2 compliant








Certificate Number: FM 35285

Technical Specifications:

Alarm System	EN50131-2-8:2016, EN50131-5-3:2017,
	EN50131-1:2006+A2:2017, PD6662:2017, Grade
	2 Class II
Frequency Band	866.0-866.6Mhz
Dimension (LxBxW) in mm	57x27.5x8.20
Receiver LBT	Listen Before Talk
Receiver	Category 1, Class 2
Transmitter Duty Cycle	866MHz<1%
Max RF power	10mW
Low Voltage Signal	2.5V (Compensated according to temperature)
Operating Voltage	3V
Maximum Current	12mA
Quiescent Current	14uA
Relative Humidity	0 – 95% non-condensing

Dimensions & Weight

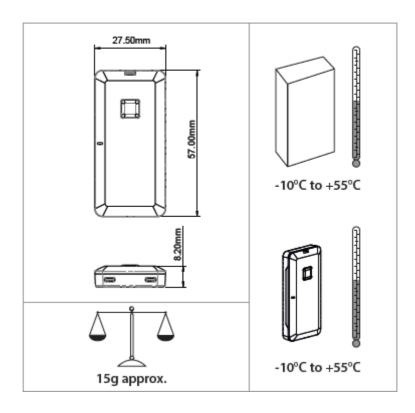







Certificate Number: FM 35285